




ABC-Mountings

type 10-A/B/C/D/E

Max. 1000 kg

ABC-Mountings are rubber to metal bonded mountings suitable for a wide range of applications. These mountings are available in a variety of shapes and dimensions and are produced in many rubber mixes. This leaflet shows the standard parts. Special shapes and dimensions on request.

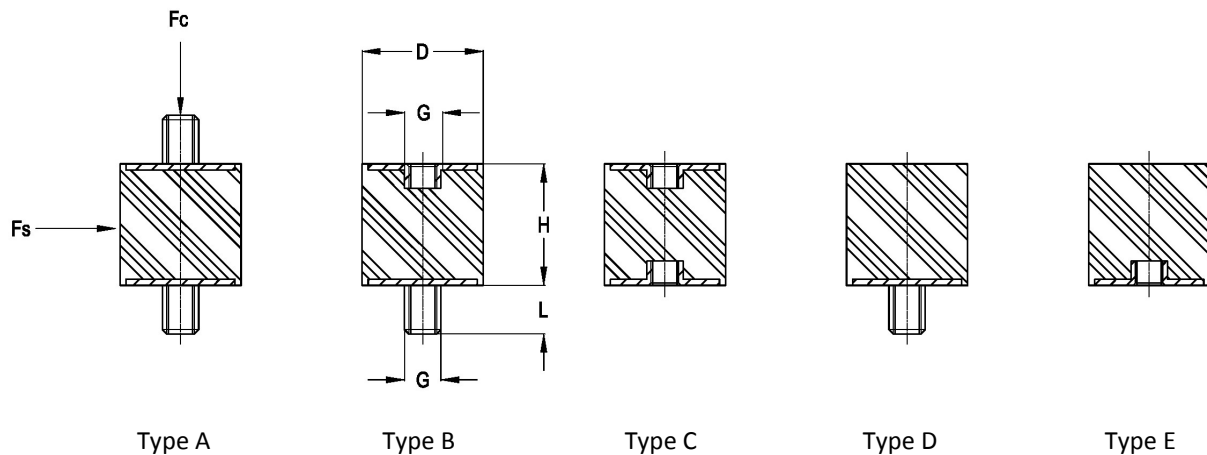

Standaard type	Dimensions				Load / Deflection (55shore)			
	D (mm)	H (mm)	G (mm)	L (mm)	Fc-max (N)	Defl.(mm)	Fs-max (N)	Defl.(mm)
A, B,C,D,E	10	10	M-4	10	40	0,7	20	1,9
A, B,C,D,E	10	15	M-4	10	40	1,3	15	3,1
A, B,C,D,E	15	15	M-4	13	90	1,2	35	3,1
D,E	15	18	M-4	-	90	1,5	-	-
A,B,C	15	20	M-4	13	90	1,8	30	4,4
A,B,C	15	25	M-4	13	90	2,4	25	5,6
A, B,C,D,E	15	28	M-4	13	80	2,6	20	6,8
A,B,C	15	30	M-4	13	80	2,6	20	6,8
A,B,D,E	20	15	M-6	15	200	1,2	70	2,7
A, B,C,D,E	20	20	M-6	15	170	1,7	70	4
A, B,C,D,E	20	25	M-6	15	160	2,1	60	5,2
A,B,D,E	25	15	M-6	18	320	1,1	120	2,7
A, B,C,D,E	25	20	M-6	18	290	1,7	110	4
A, B,C,D,E	25	25	M-6	18	250	2	100	5,2
A,B,D,E	30	15	M-8	20	530	1,1	170	2,7
A, B,C,D,E	30	20	M-8	20	440	1,7	170	4
A, B,C,D,E	30	25	M-8	20	400	2,2	160	5,2
A, B,C,D,E	30	30	M-8	20	370	2,6	150	6,5
A, B,C,D,E	30	40	M-8	20	340	3	100	7,5
A, B,D,E	40	20	M-8	23	900	1,6	300	4
D,E	40	28	M-8	-	700	2,6	-	-
A, B,C	40	30	M-8	23	700	2,6	290	6,5
A, B,C,D,E	40	40	M-8	23	650	3,6	260	8,9



ABC-Mountings

type 10-A/B/C/D/E

Max. 1000 kg

Standaard type	Dimensions				Loads (55shore)			
	D (mm)	H (mm)	G (mm)	L (mm)	Fc-max (N)	Defl.(mm)	Fs-max (N)	Defl.(mm)
A, B	50	20	M-10	28	1900	1,4	485	3,5
D,E	50	21	M-10	-	1900	1,4	-	-
A,B,C	50	30	M-10	28	1300	2,5	470	6
A,B,C	50	35	M-10	28	1200	3	460	7,2
D,E	50	36	M-10	-	1200	3	-	-
A,B,C	50	40	M-10	28	1100	3,5	440	8,4
D,E	50	42	M-10	-	1100	3,5	-	-
A,B,C	50	50	M-10	28	1000	4,3	410	10,9
A,B,C	60	35	M-10	28	1800	3	670	7,2
A,B,C	60	40	M-10	28	1700	3,5	650	8,3
A,B,C	60	45	M-10	28	1600	4	640	9,6
A,B,C	70	35	M-10	28	2800	3,4	1000	8,4
A,B,C,D,E	70	45	M-10	30	2300	4	900	9,7
A,B,D,E	75	25	M-12	37	4500	1,9	1100	4,7
D,E	75	36	M-12	-	3100	3,2	-	-
A,B,C	75	40	M-12	37	2900	3,4	1060	8,4
A,B,C	75	45	M-12	37	2700	3,9	1040	9
A,B,C	75	50	M-12	37	2600	4,5	1000	10,6
D,E	75	51	M-12	-	2600	4,5	-	-
A,B,C	75	55	M-12	37	2500	5	1000	12
A,B,C	75	60	M-12	37	2400	5,4	990	13,5
D,E	80	40	M-12	-	4000	3,5	-	-
A,B,C	80	66	M-12	37	3600	5,5	1050	14
A,B,C	90	50	M-12	37	5000	4	1500	10,5
A,B,C	90	55	M-12	37	4800	5	1350	12
A,B	100	30	M-16	45	6700	2,8	1980	6
D,E	100	35	M-16	-	6600	3	-	-
A,B,C,D,E	100	40	M-16	45	6500	3,2	1920	7,9
A,B,C,D,E	100	50	M-16	45	5700	4	1900	9,5
A,B,C	100	55	M-16	45	5000	4,7	1880	11,7
A,B,C	100	60	M-16	45	4800	5,24	1860	13
A,B,C	100	75	M-16	45	4300	6,7	1800	16,7
A,B,C,D,E	100	100	M-16	45	3800	8	1400	18
A,B,C	125	55	M-16	45	9500	4,6	2900	11
A,B,C,D,E	125	60	M-16	45	8600	5	2960	12,4