





SP-Mounting
type 10-SP-10000-A
Max. 10000 kg - 10 mm - 5Hz


SP-Mountings are suitable for heavy (sensitive) stationary machinery and floating floor systems. The mountings have high deflection capabilities and offer superior acoustic performance. Natural frequencies can reach as low as 5 Hz. These mountings are produced in a variety of rubber mixes and are also available in Stainless Steel 316. For the selection of these mountings we advise you to consult our engineers.

Applications: total-energy-units, generator sets, cooling equipment, floating floor systems etc.

LOAD CHARACTERISTICS

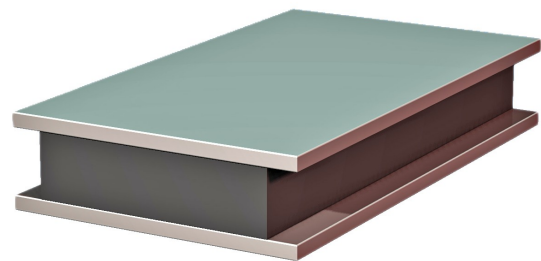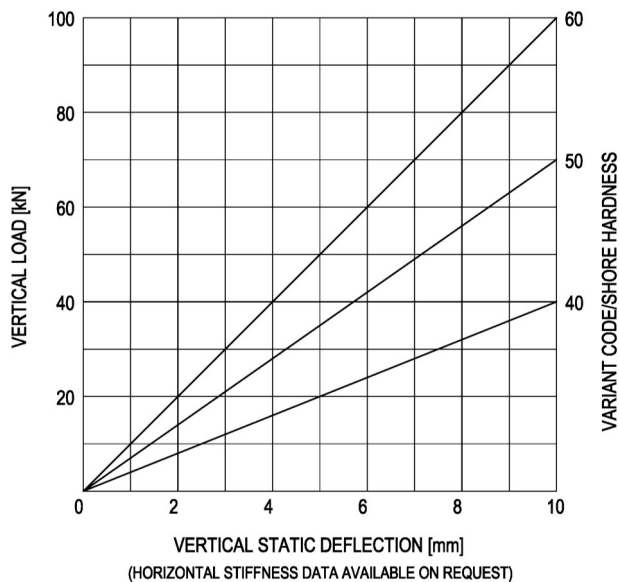

FRONT-VIEW

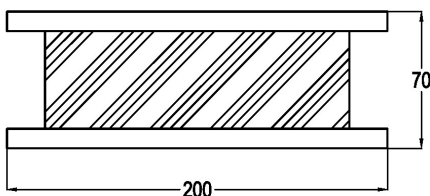

SIDE-VIEW

