


Height Adjustment

type 70-HAU-C-M24


Max. 5000 kg static

HAU height adjusters are used for the precise leveling, height adjustment and alignment of mobile and stationary machinery. The fine inner thread enables a very accurate adjustment. HAU elements can be used both solely as in combination with our anti-vibration mountings. The minimum height of the HAU unit is 40 mm. and the maximum height is 55 mm.

Applications: marine engines, generator sets, pump units, compressor sets, cooling machines, process machinery

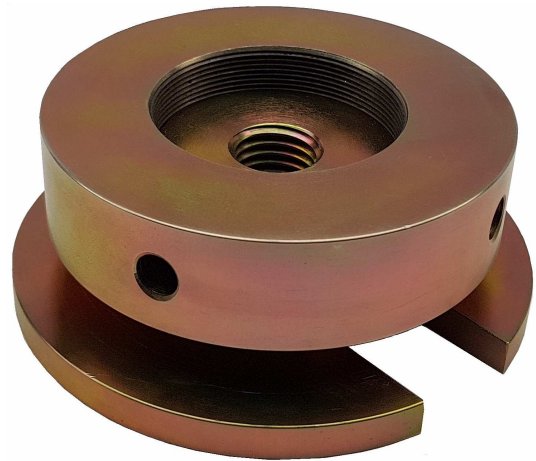

SIDEVIEW

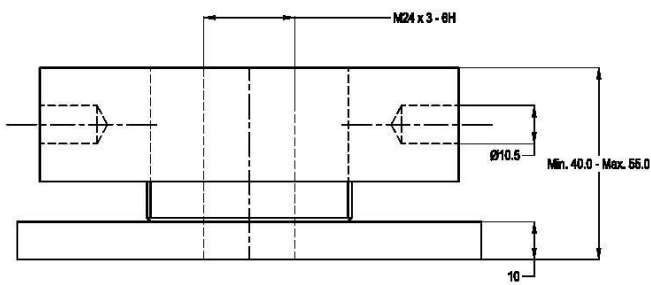

TOPVIEW

